

## CA0022

### Technical Datasheet



#### FEATURES

- Over molded connector at one end
- Mates with Glenair series 807-198, 907-216, 807-217 receptacle connector
- Cable shielding terminated at each connector shell to provide effective noise shielding


#### APPLICATIONS

- Charge/discharge cable for UBBL06 (LI-145) and UBBL08 (LI-80)

#### SPECIFICATIONS

Part No	CA0022	
Type	Shielded Cable	
Number /Type of Conductors	6 insulated multi-strand wire bundles (internal)	
Conductor Gauge	22AWG (Tin Plated Copper)	
Voltage Rating	300V (Max)	
Temperature Rating	-20°C to 90°C	
Length	610mm (2ft)	
Termination	Glenair connector P/N 807-215-06ZNU6-6PYB at one end, flying leads on the other end.	
Shield Termination	To connector shell (internal)	
Diameter	At Connector	15.2mm (0.6")
	At Core	5.8mm (0.23")
Weight	~0.45kg (1.0lb)	
Jacket & Overmold Material	Polyurethane. Homogeneous bond between cable & overmold.	
Color	Black	
Markings	Cable part number, description & serial number printed on cable sleeve. Connectors marked with alphabetic pin designators.	

#### Maximum Dimensions in mm [inches]

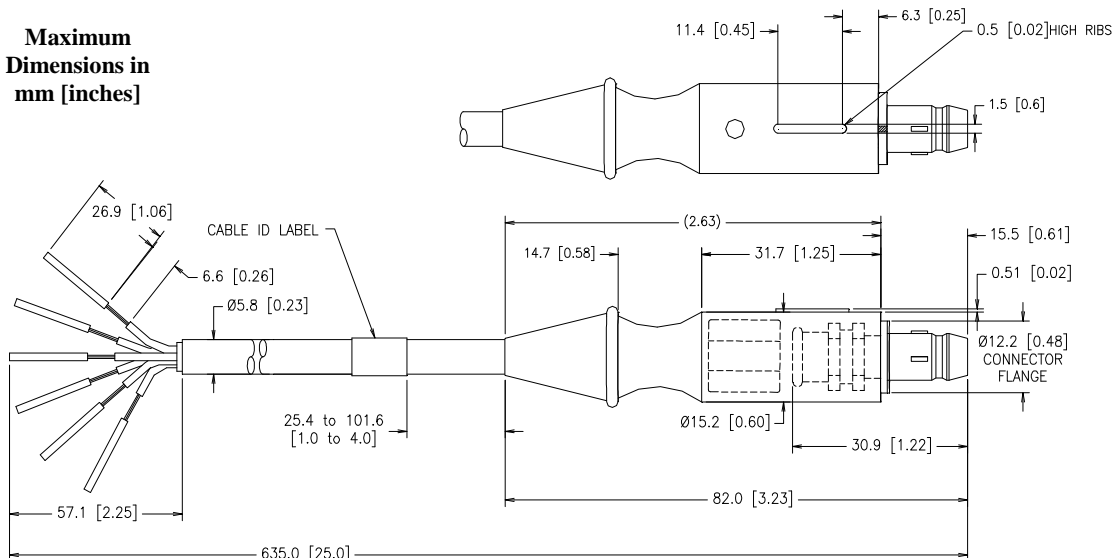

#### CONTACT TABLE

CONTACT No	CONDUCTOR
1	RED
2	BLACK
3	BROWN
4	YELLOW
5	ORANGE
6	GREEN

