


CH0002 Battery Charger

For Battery Part Number: **UBBL02 (Type: UBI-2590)**

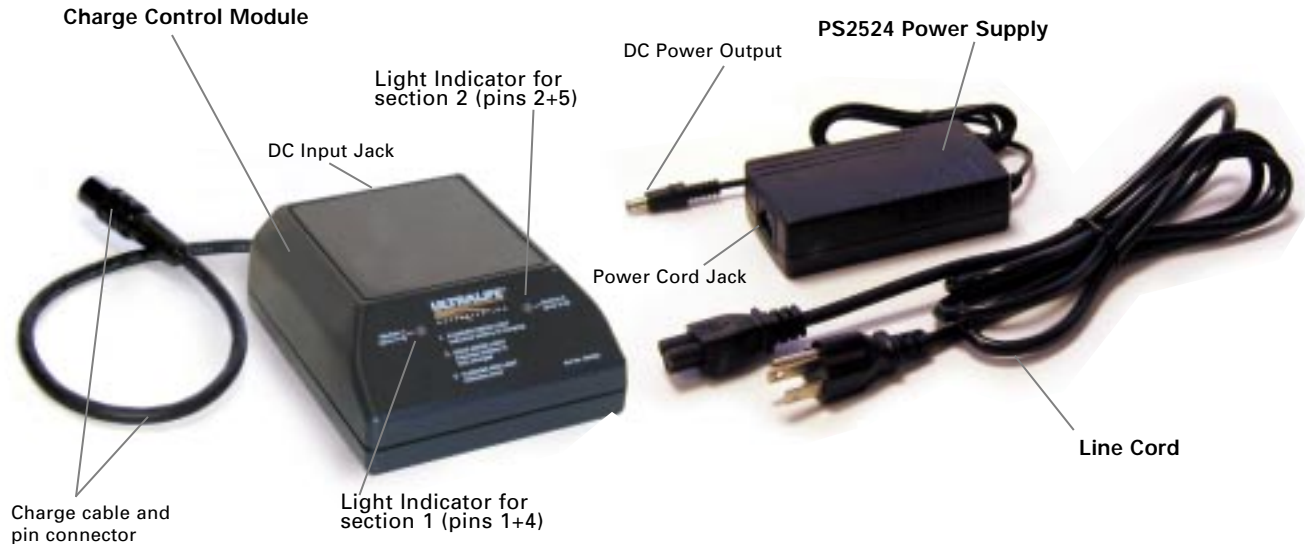

Use with UBI-2590 (UBBL02) Lithium-Ion battery only

Before you begin


1. The charger consists of three parts, a line cord, a power supply (PS2524), and a charge control module that has a charge cable attached. Make certain the line cord is the proper type for your application (i.e. the plug is correct for your wall outlet).
2. The charger is designed for use between 0°C and 50°C (32°F and 122°F). Failure to operate charger in this range will result in reduced battery capacity and/or ability of safety devices to activate.

Function

The charger is designed to charge each section of a UBBL02 battery independently. This assures that the two sections of the battery are both fully charged and assists in maintaining proper charge balance within the battery.



Charge Cable Connector

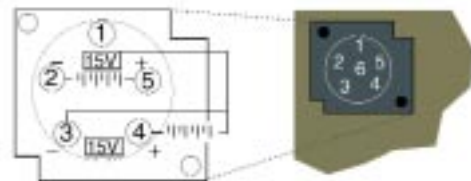

Connector Pin Schematic

Connection Instructions

1. Connect the line cord to the power supply.
2. Connect the power supply to the charge control module.
3. The charge control module has a built-in mating connector that will connect to the UBBL02 battery. Carefully orient the connector so that Pin 1 matches Pin 1 on the battery connector. Press the connector firmly into the battery.

Although the connector is keyed, failure to orient it properly can cause damage to battery and/or charger.

4. The charger will automatically detect the presence of a connected battery and initiate the charging sequence. This is identified by the blinking green lights on the charger.

Continued on back...

Charging

1. The charger will charge both battery sections until each section is fully charged. The green lights will blink during charging.
2. Once charging is completed, the green lights will stop flashing and remain solid.
3. Each battery section may complete charging at different times, which is due to small differences in capacity between the battery sections. Wait for both green lights to remain solid before removing the battery from the charger.

Maintenance Charging

If left connected to the battery, the charger will initiate a low rate charge every 24 hours to maintain a fully charged battery.

Error Conditions

If an error condition is detected the red light will blink.

Status Light Indications:

- Off No battery detected
- Green blinking Charging
- Green steady on Charging Complete
- Red blinking Error: Shorted terminals or invalid battery chemistry

Charger Specifications:

See UBI-5134

