

CA0009

Technical Datasheet



FEATURES

- Over molded connector at one end
- Mates with Glenair series 807-198, 907-216, 807-217 receptacle connector


APPLICATIONS

- Charge/Discharge cable for UBBL06 (LI-145) and UBBL08 (LI-80)

SPECIFICATIONS

Part No	CA0009	
Type	Non Shielded Cable	
Number /Type of Conductors	6 insulated multi-strand wire bundles (internal)	
Conductor Gauge	22AWG (Tin Plated Copper)	
Voltage Rating	300V (Max)	
Temperature Rating	-20°C to 90°C	
Length	610mm (2ft)	
Termination	Glenair connector P/N 807-215-06ZNU6-6PYB at one end, flying leads on the other end.	
Diameter	At Connector	12.7mm (0.5")
	At Core	5.8mm (0.23")
Weight	~0.45kg (1.0lb)	
Jacket & Over mold Material	Polyurethane. Homogeneous bond between cable & over mold.	
Color	Black	
Markings	Cable part number, description & serial number printed on cable sleeve. Connectors marked with alphabetic pin designators.	

Maximum Dimensions in mm [inches]

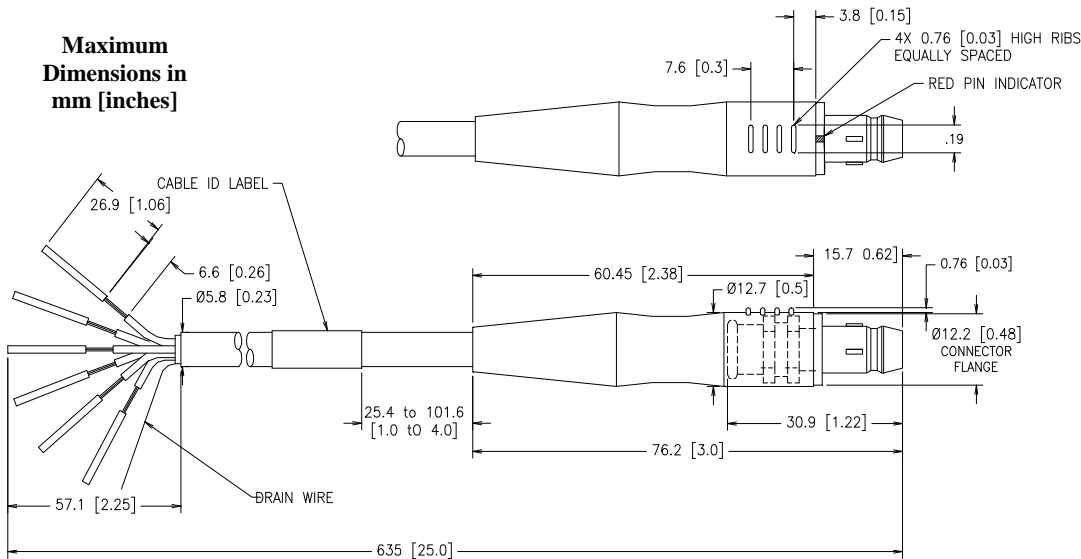

CONTACT TABLE

CONTACT No	CONDUCTOR
1	RED
2	BLACK
3	BROWN
4	YELLOW
5	ORANGE
6	GREEN

